



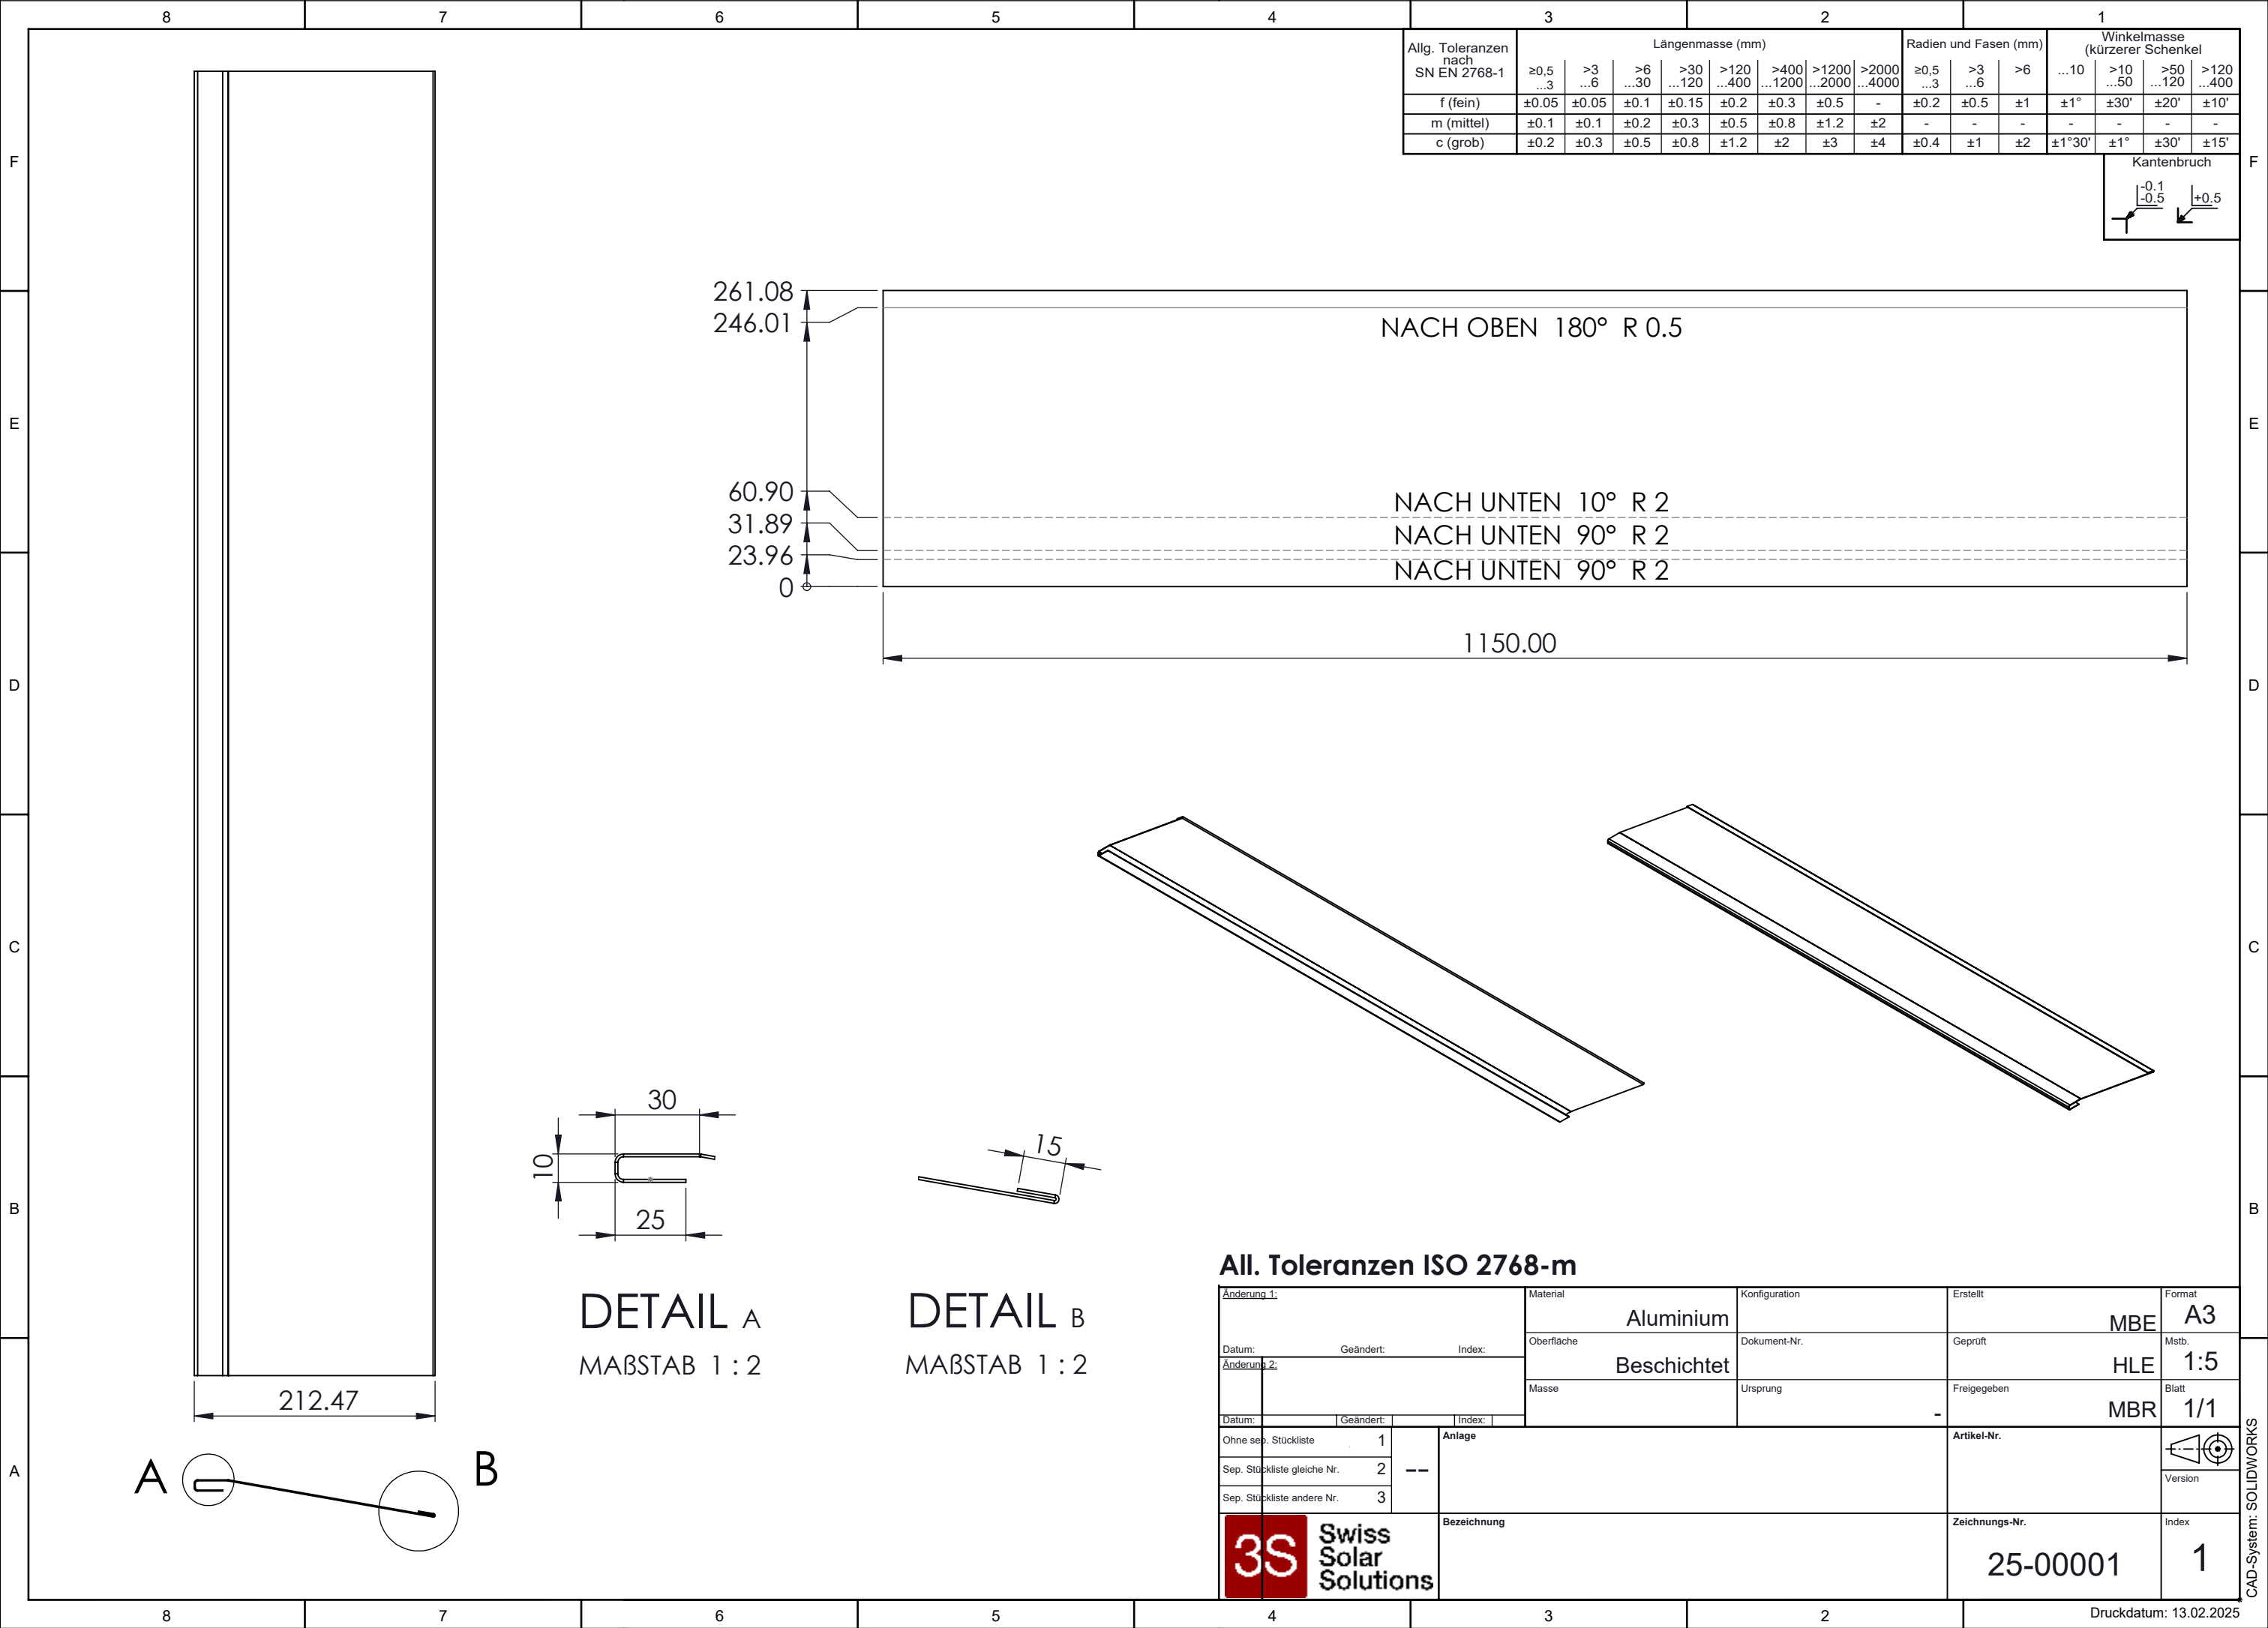

Allg. Toleranzen nach SN EN 2768-1	Längenmasse (mm)								Radien und Fasen (mm)			Winkelmasse (kürzerer Schenkel)			
	≥0,5 ...3	>3 ...6	>6 ...30	>30 ...120	>120 ...400	>400 ...1200	>1200 ...2000	>2000 ...4000	≥0,5 ...3	>3 ...6	>6	...10	>10 ...50	>50 ...120	>120 ...400
f (fein)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±0.2	±0.5	±1	±1°	±30'	±20'	±10'
m (mittel)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	-	-	-	-	-	-	-
c (grob)	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	±0.4	±1	±2	±1°30'	±1°	±30'	±15'



All. Toleranzen ISO 2768-m

Änderung 1:				Material		Konfiguration		Erstellt		Format
Datum: Geändert: Index:				Aluminium				MBE		A3
Änderung 2:				Oberfläche		Dokument-Nr.		Geprüft		Mstb.
Datum: Geändert: Index:				Beschichtet				HLE		1:5
Ohne sep. Stückliste 1				Masse		Ursprung		Freigegeben		Blatt
Sep. Stückliste gleiche Nr. 2								MBR		1/1
Sep. Stückliste andere Nr. 3				Anlage				Artikel-Nr.		Version
3S Swiss Solar Solutions				Bezeichnung				Zeichnungs-Nr.		Index
								25-00001		1